

Specifications

- 1 **Lighting (EcoPlus LED back lit light box):**
Color temperature: 6500K
Strict LED binning standards assure consistent & high quality illumination
State of the art back lit technologies provide uniform illumination for the Luminous SkyTile graphic
Housed in a white powder-coated (non-ferrous) aluminum frame
Moisture and chemical resistant
Each unit has a four knock-out junction box
Use in MRI, and other RF-free environments
- 2 **Luminous SkyTile (lens):**
Acrylic, Acrylite, or polycarbonate substrate
Lightweight & durable
High resolution reproduction from proprietary digital image file
Color-calibrated for daylight quality light source
Non-glare matte finish
Fade resistant pigmented inks containing UV inhibitors
Designed to fit Luminous SkyTile Standard Elevator
- 3 **Classic Elevator (frame):**
Moisture resistant, light weight aluminum
1.25" (31.8mm) vertical profile
Quick and easy installation
Powder coated, white matte finish to match standard grid
Compatible with standard 15/16" grid systems
Precision machined corners, seamless architectural appearance
- 4 **Perimeter and Grid:**
Armstrong Prelude Plus white aluminum 15/16" ceiling grid pre-cut to fit
PVC perimeter pre-molded, cut to length and painted to match grid

UL, CSA, and CE Certified:

EP and EPCST Series when used with 24PS HLG Power System,
UL Listed or CE Compliant power supply fully certified by Intertek Group plc

Electrical:

24V DC, Amps and Watts varies per EP & EPCST Series fixture size
Approx. .25 Amps, 6 Watts per square foot (30cm x 30cm)
Sky Factory 24PS HLG Power System
Converts 90-305V AC to 24V DC
Size and quantity per installation calculated by Sky Factory
Power system aluminum enclosure
Mounted on baseplate with junction box on input and output ends
See 24PS HLG Power System Technical Specifications sheet
Sky Factory provided HLG dimmable power supply (International Only)
Converts 90-305V, 47-63 Hz to 24V DC
Client provided UL Listed or CE Compliant power supply
Must convert V AC to 24V DC
Items not provided:
AC wiring between fuse/breaker panel and 24V DC power system
DC wiring between 24V DC power system and EcoPlus light box
Dimmer wiring between 24V DC power system and switch/dimmer control box
RFI/EMI filters for MRI installations
See Circular w/ EcoPlus Installation Instructions; and
Custom EcoPlus Electrical Packet (24PS HLG), Electrical Instructions (HLG) or
Electrical Instructions (Fixture Only)

| STANDARD CIRCLE (DIAMETER) POWER CONSUMPTION | | | | | | |
|--|-------|-------|-----------|-------|--------|--------|
| | 5' | 6' | 8'-6 5/8" | 10' | 11'-9" | 14'-3" |
| WATTS | 103.5 | 155.3 | 304.8 | 425.5 | 580.8 | 891.3 |

Ceiling Clearance Dimensions:

Minimum space required above ceiling grid: 7.25" (18.5cm) – 11" (28cm)
depending on extent of fixture pre-assembly before installation in grid, and access to adjacent grid sections

Installation:


Elevators, tiles and luminaires easily installed into standard 15/16" grid system provided.
Circular SkyCeilings are designed to be recessed into a variety of hard ceilings.

Circular EcoPlus

EP-CIR

Ceiling Grid Mount


Back Illuminated Sky Image Ceiling

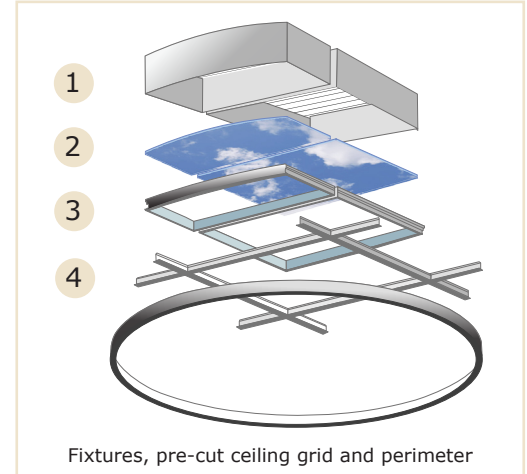

Key Attributes:

15/16" (24mm) ceiling grid mount
Low profile – 7.25" (18.5cm) high
6500 Kelvin – cool daylight
Non-ferrous, RF-free construction

Dimensions and Weight

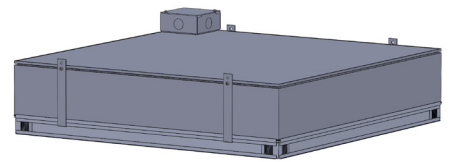

Length and width varies per installation
x 7.25" (18.5cm) deep
Fully assembled fixture approx. 2.8 lbs (1.27kg)
per square foot (30cm x 30cm)

Configurations:

For sample configurations, go to skyfactory.com

US Patent Information:

Our products, systems, and methods may be protected by one or more of the following US Patents:
Pat. 9,164,011, Pat. 8,851,700, Pat. 7,959,316,
and Pat. 7,481,550, as well as other patents pending.